



Hon. Pedro R. Pierluisi Urrutia
Gobernador

Lcda. Karla G. Mercado Rivera
Administradora y Principal Oficial de Compras

NOTIFICATION NUMBER 3
FORMAL AUCTION 22 J-09599

**Purpose Modernization of Ammunition Supply Point (ASP) Maintenance Facility at Camp Santiago
Joint Training Center (CSJTC)**


SUBJECT: REQUEST FOR CLARIFICATION

Tenderers are notified of the Request for Clarification answers of the formal auction questions.

Issue Number	Items	References	Clarification Request	PRNG Answers
1	TELECOMM	T-101	Note 3 and 6, requires racks installation at IDS Building. Both are the same rack it will be required the installation of two racks at the IDS Building	IDS Building is an existing facility no new rack will be installed in this building. The only new racks required are one for the guardhouse building and one for the warehouse building. See Guardhouse FACILITY "B" plans T-101 and FACILITY "A" Plan T-101 of the ammunition Supply Point Plans for details.
2	TELECOMM	T-502	Detail 1 shows an empty Rack, no equipment shown. // i. What equipment will be required on this rack? // ii. How will be terminated the OF cable? // iii. What type of connectors will be used? Pigtailes splices or field terminated connectors?	The Contractor is responsible to provide the proposed cabinets as specify. The equipment shown on drawings for this cabinets are not part of this contract.
3	TELECOMM	T-502	Detail 3, Note 4 We need more information rewarding " 1RMU 24 POSITION DUPLEX LC COONECTOR PATCH PANEL" We have notice, no copper patch panel in this detail. Where copper terminations will be done for Data Drops?	Equipment on rack shown on detail 3 are not part of this contract.
4	TELECOMM	T-101	Note 3, ask for 3-3 cell inner ducts. Is this works part of the scope of work if this Bid? If so, from where to where these inner ducts will be installed?	The installation of cell innerducts are not part of this contract. Each existing pull box is prewired.

5	TELECOMM	T-602	Note 1- "FIBER AND COPPER CABLES FROM BASE NETWORK WILL BE BROUGHT INTO PULL-BOX 1, PULLED THROUGH UOO-BOX INTO ISP By OTHERS" Is this work part of the scope of this Bid?	Each of the Existing conduits shown on drawing T-602 are pre-wire. The KTR must pull the existing wires to each of the buildings as shown.
6	TELECOMM	T-602	Note 2 -"CABLES WILL BE TERMINATED IN ANEQMT RACK IN THE ISP BLDG BY CONTRACTOR" // a. This work is part of the scope of this Bid? // b. Where terminations will be done? // c. How many Fiber optic strands will be required? // d. What type of fiber optic is required? OS1, OS2, OM3/OM4? // e. If there are copper cable, how many pairs, type CAT 6 CAT 6A // f. Where copper terminations will be done?	Note 2 in plan sheet T-602 refers to another government project already finished. See previous comments regarding TELECOMM equipments.
7	TELECOMM	T-602	Note 4. "THE GUARDHOUSE & WAREHOUSE WILL BE CONNECTED TO THE NETWORK THROUGH THE COMMUNICATION EQUIPMENT RACK IN THE ISP BLDG BY THE CONTRACTOR" // a. The fiber optic connecting the guardhouse with the ISP is part of the Scope of this Bid? // b. We need details for cables // c. If copper cable between guardhouse and ISP is require please provide details.	The Required infrastructure is already in place. See above comments regarding TELECOM equipment.

This notification is part of the auction specifications and those interested in bidding will have to consider it when submitting their bid. All other terms, conditions and specifications will remain unaltered.

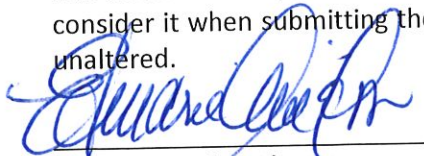

Edmarie Aviles Almenas
Secretary
ASG Auction Board

Issued today, Tuesday, June 28, 2022
San Juan, Puerto Rico



ADMINISTRACIÓN DE SERVICIOS GENERALES
Gobierno de Puerto Rico
PO Box 41249
San Juan, PR 00940
(787) 759-7676
administracion@ asg.pr.gov

